

KwiXseal™

HOTMELT SYSTEMS

KwiXseal
THERMOSEALANT
SEALANT

KwiXseal
THERMOSEALANT
SEALANT

CAUTION
HOT
LIQUID

MADE IN THE
USA

KwixSeal products are made in the U.S.A. By DaverCo - Pflugerville, Texas



KwixSeal™ is a low voltage, on demand, hotmelt rubber delivery system that can be used for a variety of applications in multiple industries.



By

DaverCo™

20111 A Mashburn Street
Pflugerville, Texas 78660-6510

Main Number: (512) 520-8722

Email: Info@DaverCorp.com

www.kwixseal.com





The KwixSeal™ machine is portable hot melt dispensing system that features an all electric / low voltage operation, a heated material bin, hose

KwixSeal™ Product Features:

- * PROVIDES CUSTOM FIT EXPANSION JOINTS
- * APPLIED HOT, TRAFFIC READY IN MINUTES
- * FOR CONCRETE & ASPHALT CRACKS & JOINTS
- * MATERIALS WITHSTANDS HI OR LOW SLAB TEMPS
- * EASY REPAIRS - MATERIAL CAN BE RE-HEATED
- * VARIETY OF COLORS & TEXTURES POSSIBLE
- * APPLIED MATERIAL MEETS APPLICABLE ASTM, AASHTO, FEDERAL & STATE REQUIREMENTS
- * FOR PROFESSIONAL USE ONLY

- * *Zero Waste*
- * *No Mixing*
- * *No Waiting*
- * *Cuts labor costs*
- * *Minimizes Barricade Use*



KwixSeal™ Uses Hotmelt Rubber

Patent Pending



Optional 100 lb. Material Hopper available for convenient refilling.

For use on driveways, sidewalks, shopping centers, office buildings & more!

WWW.KWIXSEAL.COM



KwixSeal™ Rubber is Applied Hot



Traffic Ready in Minutes



Custom Colors & Textures



Simply Re-heat to Repair any areas

KwixSeal™ offers a custom-fit, immediate use, long lasting & durable expansion joints.

KwixSeal™ Hot Melt System Data Sheet

Description: The KwixSeal™ hot melt system is a low voltage, light-weight / portable unit that accommodates on-demand delivery of a high viscosity adhesive sealant material. It can be used for a variety of delivery application such as filling expansion joints in concrete, mounting roadway markers, repairing cracks or holes in asphalt or concrete as well as the sealing traffic signal loops and adhering roadway markers. It can also be used for an endless number of tasks for construction jobs for bonding materials together or even doing repairs where adhesives such as a urethane, caulk or glue are typically used but with one major advantage, almost immediate bonding and use.

Features include an all-electric, low voltage system that is light in overall weight, portable that heats, maintains and delivers desired material at application temperature. No compressed air or direct fire heating is utilized.

KwixSeal™ is also a weather resistant mobile melting device featuring a variable length jacketed hose with a long-life cool-touch plastic shielded sleeve. A handgun applicator is supplied with each unit with an optional three foot wand available as an upgrade. The applicator is designed for maximum accuracy along with operator comfort. A check valve in the tip allows for immediate cut off of material which prevents dribbling and dripping from tip of gun.,

BUILT TO ORDER:

Part number and description: KwixSeal 100 .ver

#KS- 100 Rover - Weather resistant manual unit, 110 /230 VAC, variable length heated hose, applicator gun with tip mounted on sturdy metal dolly / optional.

FEATURES AND OPTIONS - Standard Components

KwixSeal™ Hotmelt Sealer system includes the following features:

Steel Construction

Sturdy Portable Cart

100 lb. Capacity Heated Tank

Heavy duty heated hose & gun

380 Degree (F) Temperature / Standard operation

Temperature Control Settings

DaverCo™


20111-A Mashburn Street

Pflugerville, Texas 78660-6510

Main Number: (512) 520-8722

Email: info@DaverCorp.com

Online: www.kwixseal.com

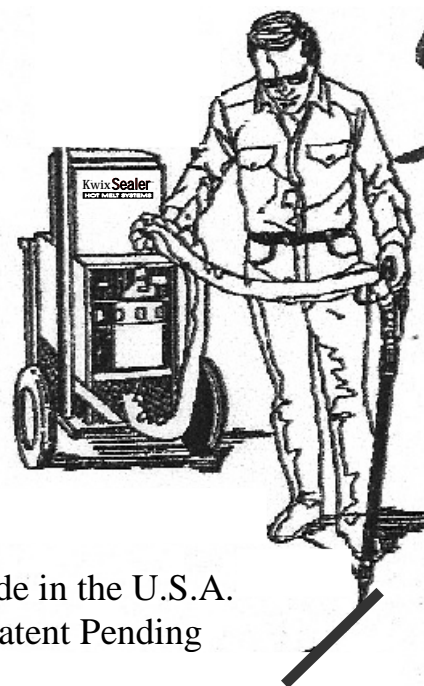

Made in the U.S.A.
Patent Pending



RE-FILLING / DOCKING CONFIGURATION @ STATIONARY MELTER

KwixSeal™ Model Ks100 features a 100 lb. heated tank, ideal for filling industry standard 1" wide expansion joints with fast-setting sealing material. Installation of up to 400 Linear Feet is possible before refilling. For jobs over 400 ft. a stationary melter is recommended.





FOR USE IN KWIXSEAL™ MELTERS

PRODUCT DATA SHEET

DESCRIPTION KwixSeal™ hotmelt rubber is a light colored, hot applied, single component, elastically modified composition of non-asphaltic ingredients and modifiers. The sealant contains no solvent, is pre-reacted and when properly heated and applied, results in exceptional adhesion to both concrete and asphalt pavements. Designed for use in recessed reservoir applications.

USE KwixSeal™ rubber consists of a moderate viscosity pavement preservation sealant intended for use on highways, streets, aviation, residential and commercial parking area applications, swimming pools, patios, porches, sidewalks & recessed joints and cracks in concrete and asphalt. When properly installed, it provides an effective barrier against damage from debris, moisture, weeds, insects and other living creatures from entering the areas. For use in moderate low to high pavement temperatures.

HEATING Material can be heated in an oil jacketed or similar approved melter. Melter should contain a calibrated thermometer to monitor sealant temperature and optional agitator for stirring product. Sealant material should be heated to desired temperature and maintained during use at application temperature. Over-heating and prolonged heating without agitation can severely damage product. In the event of overheating, purge any unused material, completely drain machine, hose and all connections and refill with new product.

APPLICATION Sealant can be applied immediately once application temperature has been reached. Application area shall be clean and free of any dirt, moisture or chemicals. Application temperature must be at least 40 degrees (F) or higher. Do not over-fill areas and scrape off any material that ends up outside of joint or on surface area after it has cooled. Pavement can be warmed with Hot Air Lance or heat gun.

PROPERTIES of KwixSeal™ Hotmelt Rubber Sealant
When sampled and heated to application temperature in accordance with ASTM D5167

TEST	METHOD	SPECIFICATIONS
Cone Penetration @ 77 deg. F	ASTM D5329	75 dmm maximum
Cone Penetration @ 122 deg. F	ASTM D5329	120 dmm maximum
Flow @ 140 deg. F	ASTM D5329	5.0 mm maximum
Resilience @ 77 deg. F	ASTM D5329	60% minimum
Flexibility, 90 deg. Bend, ¼" rod 2 seconds	ASTM D3111 (modified)	Pass @ 20 deg. F
Recommended Application Temperature	ASTM D5167	300-350 deg. F
Maximum Heating Temperature	ASTM D6690	350 deg. F

- Temperature of product measured at pavement surface. Use higher range of recommended temperature in cooler weather.
- Prolonged heating at or above recommended application temperature may severely damage product. Do not install if over-heated.

PACKAGING Sealant is packaged in a variety of sizes and shapes based on customers application and desired melting technique. Square shaped cubes weighing from 5 to 30 lbs. Are available for hot melt machine use while 5/8" thick sections are available in a "pin-wheel" form factor for direct fire applications where a hot melter is not available. All products are packaged in moisture resistant plastic wrapping.

PERFORMANCE Many factors influence the effectiveness and useful life of KwixSeal™ hotmelt sealan applications; outside temperature, material temperature, site conditions, sloped surfaces, thickness, surface preparation moisture, debris, surface and shape factor all influence to consider when installing the product. Consider and monitor each element to achieve optimal results. .

WARRANTY Manufacturer warrants that product sold meet applicable ASTM, AASHTO, Federal or state specifications at time of shipment. Techniques used for the preparation prior to installation into cracks and joints are beyond our control as are the product use and application methods; therefore, manufacturer shall not be responsible for improperly applied or misused product. Remedies against manufacturer, as agreed to by purchaser are limited to replacing nonconforming product or refund (in full or part) of the purchase price. All claims of breach of this warranty must me made within three (3) months of date of purchase or twelve (12) months from date of delivery, whichever is earlier. There shall be no other warranties expressed or implied.



20111-A Mashburn Street
Pflugerville, Texas 78660-6510
www.kwixseal.com

Main Number: (512) 520-8722
Email: info@KwixSeal.com